



Newpowa
BE WISE GO SOLAR

NPA200S-241

Monocrystalline Module

64 Cell

Monocrystalline Module

200W

Power Output

21.3%

Maximum Efficiency

5%

Positive Tolerance



NEW
9BB Cells



9BB Cell Technology

- 21.3% max efficiency with 9BB Multibusbar technology enabling maximum BOS savings
- Multibusbar M6 Mono Half-Cell uplifted with PERC technology to guarantee higher output power and maximum module efficiency



Extreme Weather Simulation

- Withstood 1.375" diameter hailstones falling at terminal velocity
- Rugged design with hail/snow tolerance up to 5400 Pa positive load and high wind tolerance up to 2400 Pa negative load



Efficient Sorting Process

- Identify and mitigate against damaged/color-deviating/chipped cells
- Standardized cell efficiency testing to ensure optimal PV output



Highly Reliable

- Robust encapsulation and diffusion barriers provide long term protection against PID damage
- Adaptability to temperatures below 0°F to 149°F

Product Certificate

Management Certificate

Other certificate

Positive mechanical load

Positive Power Tolerance

Warranty

IEC 61215, IEC 61730

ISO 9001: 2016


Fire Rating Class C, TÜV Rheinland

>5400Pa

0~+5W

25-year Linear Power
Warranty

Performance Warranty

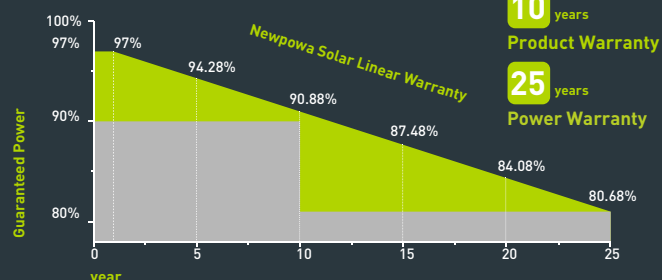



Newpowa
BE WISE GO SOLAR

ELECTRICAL CHARACTERISTICS


Type	NPA200S-24I
Power Output(W)	200W
Voltage MPP Vmp(V)	37.20V
Current MPP Imp(A)	5.38A
Voltage Open Circuit Voc(V)	43.60V
Short Circuit Current Isc(A)	5.74A
Temperature Coefficient Of Voc	-(80±10)mV/°C
Temperature Coefficient Of Isc	[0.065±0.015]% /°C
Temperature Coefficient Of Power	-(0.5±0.05)% /°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C

STC: 1000W/m² Irradiance, 25°C module temperature, AM1.5g spectrum according to EN 60904-3



MECHANICAL CHARACTERISTICS

Cells	Monocrystalline Silicon
Solar Cells Grade	Class A High Efficiency
Module Dimension(in./mm)	55.28[1404]x27.76[705]x1.38[35]
Weight(lbs/kg)	24.12[10.94]
Packing Information(in./mm)	57.24[1454]x29.72[755]x2.48[63]/(1pc/ctn)

I-V CURVES (Irradiance: AM1.5, 1km/m²)

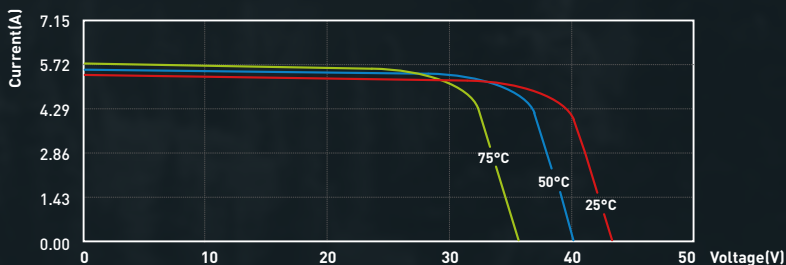

*Specifications subject to technical changes and tests.
NEWPOWA reserves the right of final interpretation.

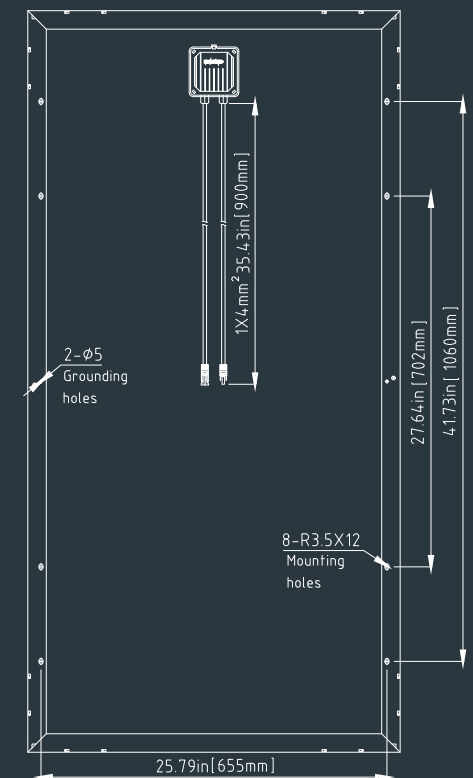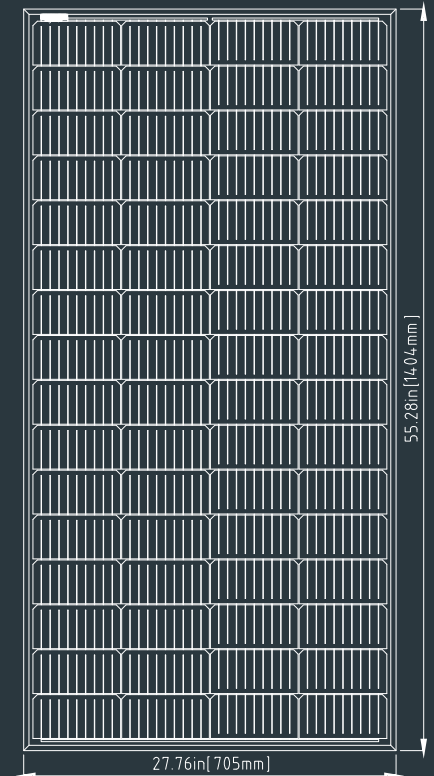

702-628-7600



sales@newpowa.com



www.newpowa.com



3633 Inland Empire Blvd, Ste 600, Ontario, CA 91764